



GEOCELLS

for FLOOD CONTROL

ENVIRONMENTALLY FRIENDLY



- Low carbon footprint
- Reusable
- Minimal storage space
- Cost effective - ROI

CERTIFIED FOR FLOOD CONTROL



- Tested by the US Army Corps of Engineers.
- GEOCELLS outperform traditional sandbags in all tests, including time to install, seepage, time to remove and overall endurance.


LIGHTWEIGHT, PORTABLE & EASY TO INSTALL



- Compact - Can be transported by just one person
- Lightweight aluminum frame
- Adjustable for all sizes
- Installed & filled right where you need it
- 40' ISO = 1km wall 2m x 2m



GEOCELLS - SANDBAGS COMPARISON

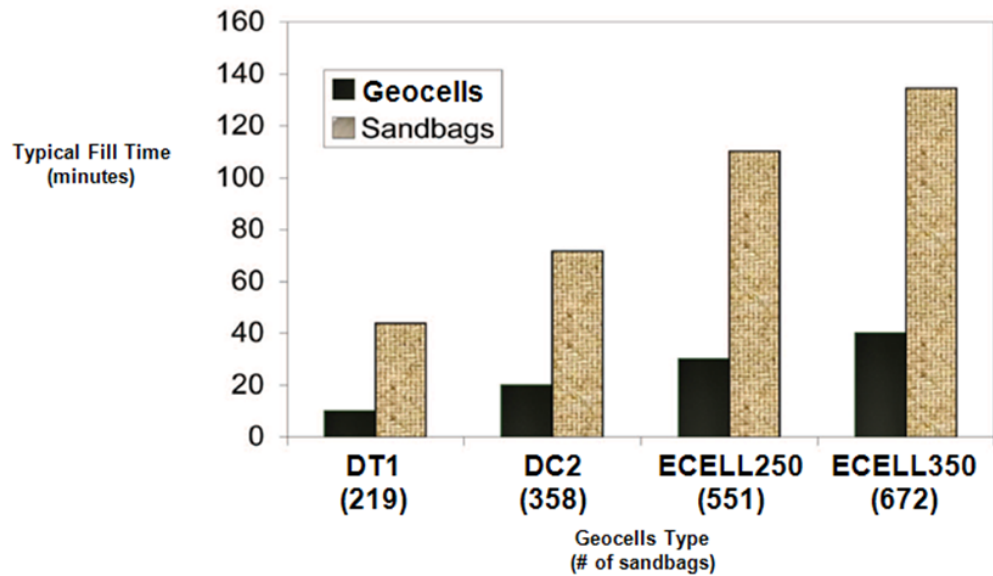

Sandbags are expressed as full volumes.

Sandbags time is estimated at 12 seconds per sandbag and is based on using an automated sandbag filling machine in close proximity to the wall.



Geocells can be filled manually or with standard construction equipment



TYPAR GEOCELLS

CONTACT INFORMATION

Michel Boyer
514-772-5382
michel_boyer@dbbinc.ca